




Qpad X9

Robust GNSS Tablet

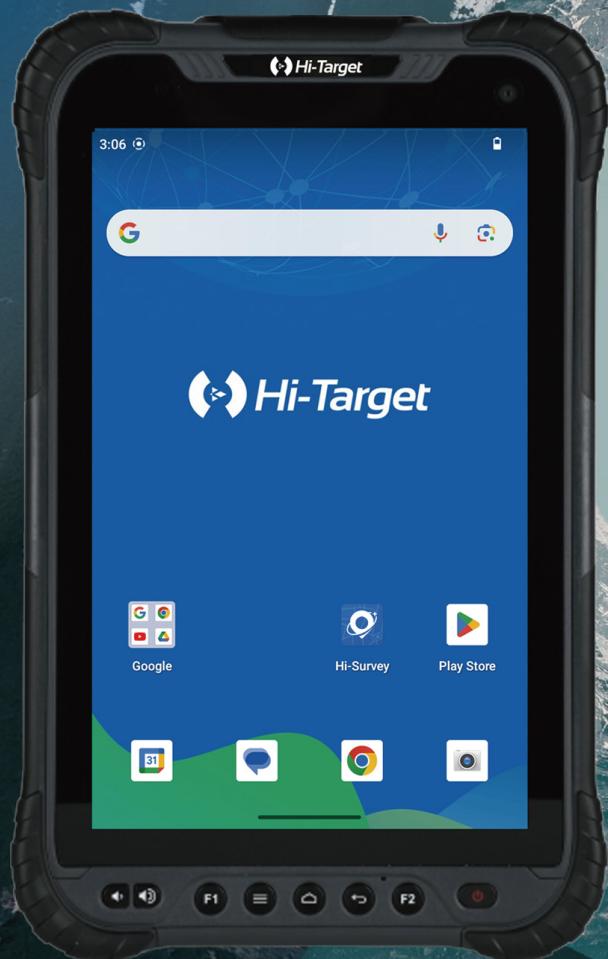

TECHNICAL SPECIFICATIONS

Hardware	Channel	1408
	OS & Processor	Android 10, 8 core high-speed processor
	Storage	RAM 6GB, ROM 128GB, SD card 128 GB
	Display	8-inch display, touchable screen
	Resolution	1280x800, 800nit, sun-readable
	Camera	16M pixels rear camera, autofocus; 8M pixels front camera, fixed focus Dual highlight LED flash
	Built-in Sensor	L-sensor (Compatible Design), G-sensor, Gyroscope, E-compass
	USB	USB 2.0, Type-C, OTG function
	SIM	Support Nano SIM
Communication	Network Type	TDD-LTE: B38/B39/B40/B41 FDD-LTE: B1/B3/B5/B7/B8 WCDMA: B1/B5/B8
	Wi-Fi	IEEE802.11 a/b/g/n/ac(Dual Band 2.4&5 GHz)
	Bluetooth	Bluetooth 5.0, BLE
	NFC	NFC 13.56MHz, work distance≥3cm, support ISO/14443 A/B, ISO/15693, NFC-IP1, NFC-IP2 M1 card(S50, S70), CPU card, NFC label
Battery²	Capacity	3.8 V, 8200 mAh removable battery
	Charging time	≤ 4 hours
Physical	Size	235 mm*146 mm*14.5 mm
	Weight	656 g
	Temperature	Working: -10°C to +55°C; Storage: -40°C to +70°C
	IP Rating	IP67, and 1.2m free drop

Descriptions and specifications are subject to change without notice.

1.SBAS and RTK accuracy are based on all GNSS constellations(GPS,Glonass, Galileo and BDS) availability, under clear unobstructed environment, multipath-free, standard satellite geometry and atmospheric conditions.

2.The battery operating time is related to the operating environment, operating temperature and battery life.



AUTHORIZED DISTRIBUTION PARTNER

25J119

Hi-Target Surveying Instrument Co., Ltd

ADD: Hi-Target Headquarters, No. 6, Hongchuang 2nd Street, Nancun Town, Panyu District, 511442 Guangzhou, China.
www.hi-target.com.cn +86-20-28688296 sales@hi-target.com.cn