


# V600L

## LASER RTK

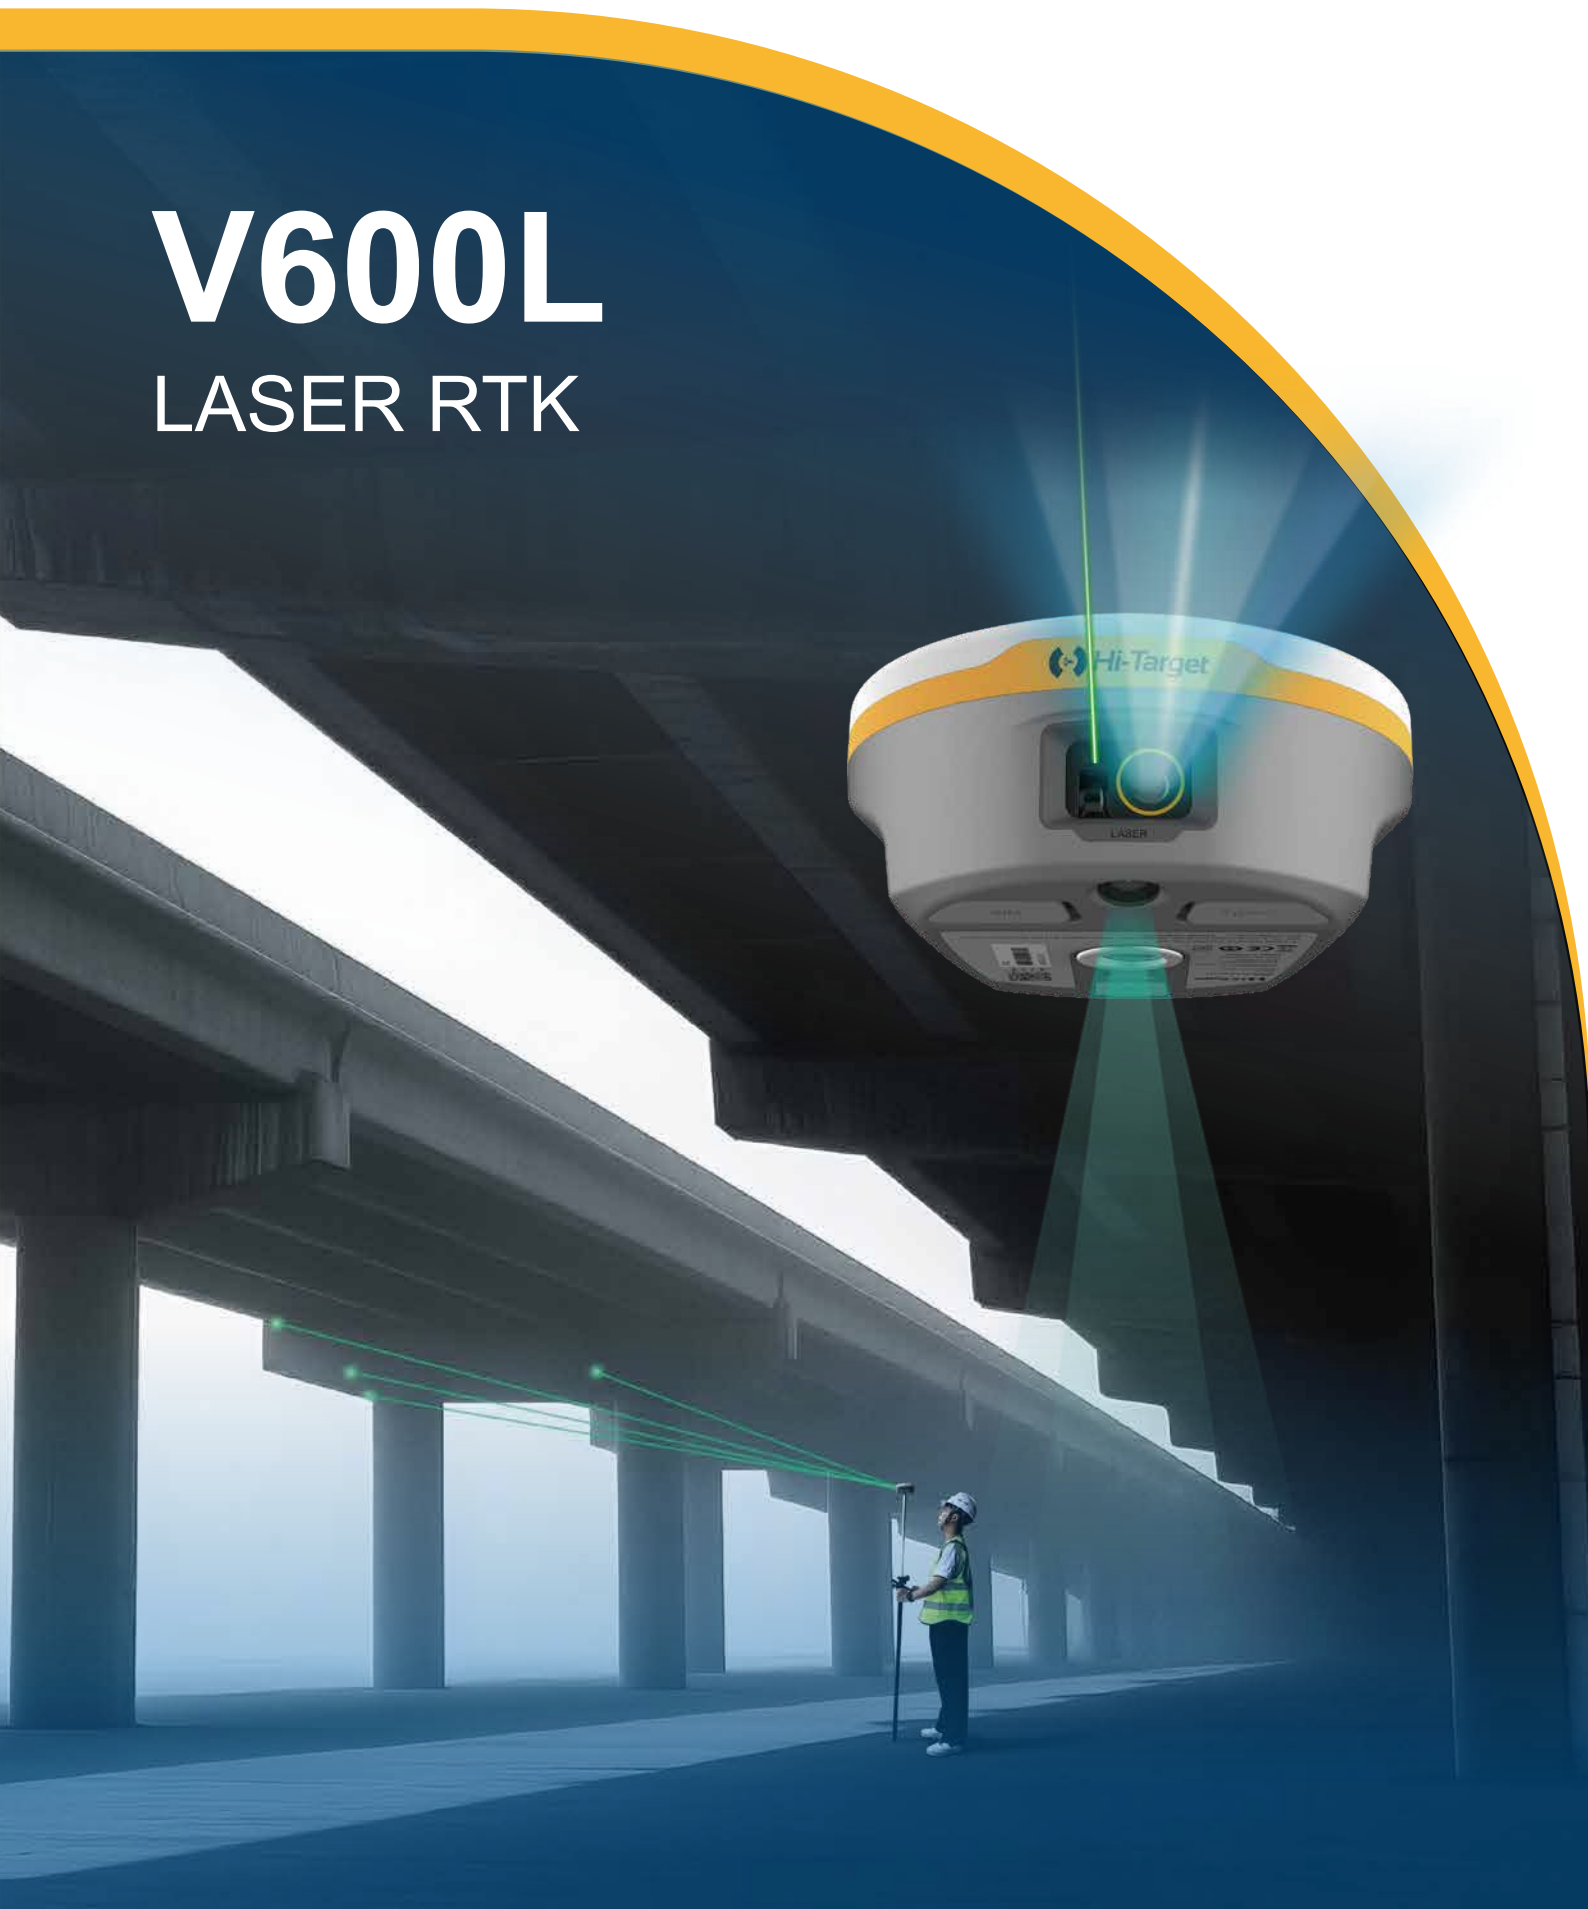

# V600L LASER RTK

Hi-Target next-generation Laser RTK that combines GNSS, IMU, dual-camera, and visible laser technologies for immersive, efficient, and precise fieldwork—especially in environments like under bridges, near fences, or across ditches.

With visualized laser targeting and non-contact measurement, it unlocks a new level of accessibility and safety in obstructed, complex, or semi-enclosed terrains.



## High-Precision Laser Surveying — Even Without GNSS

By fusing laser and visual technologies, our system delivers non-contact measurements with up to 2 cm accuracy within 10 m. Operate confidently in GNSS-denied environments such as under bridges, inside fenced zones, or across ditches, all from a safe and convenient distance.



## IMU You Can Trust — No Initialization Needed

With automotive-grade IMU, no initialization needed. Start measuring instantly with up to 40% better stability and accuracy, even on rugged terrain.

## Built-in LoRa Radio, Cross-Brand Compatibility

Integrated LoRa transceiver supports multiple protocols and brands, delivering over 15 km working range in typical environments.



# Hi-Survey Software

## Survey Data Collection Software

Hi-Survey is an Android software that is designed for all types of land survey and road engineering projects in the field. It is compatible with Hi-Target professional controllers, Android phones, tablets and other third-party Android devices. It is a sleek and easy-to-use software that supports the operating of big data with built-in tools. With customized industrial application solutions, more possibilities are created for users.



### Visual Laser Targeting

Seamlessly integrates laser and imaging technologies displaying the laser spot directly on the screen for fast, intuitive aiming. No guesswork, no extra steps.



### Real-Scene CAD Stakeout

Combines a high-performance CAD engine with real-world imagery to deliver a visual stakeout experience. Stake with confidence and boost efficiency by up to 50%.



AUTHORIZED DISTRIBUTION PARTNER

25N105

### Hi-Target Surveying Instrument Co. Ltd

ADD: Hi-Target Headquarters, No. 6, Hongchuang 2nd Street,  
Nancun Town, Panyu District, 511442 Guangzhou, China  
www.hi-target.com.cn +86-20-28688296 sales@hi-target.com.cn

# TECHNICAL SPECIFICATIONS

<b>GNSS Signal<sup>[1]</sup></b>	Channel	1408			
	GPS	L1C/A, L1C, L2P(Y), L2C, L5			
	BDS	B1I, B2I, B3I, B1C, B2a, B2b			
	GLONASS	L1, L2, L3			
	GALILEO	E1, E5a, E5b, E6			
	QZSS	L1, L2, L5, L6*			
	NavIC	L5			
	SBAS	L1, L2, L5			
<b>Positioning Performance<sup>[2]</sup></b>	High-Precision Static	H: 2.5 mm + 0.1 ppm RMS		V: 3.5 mm + 0.4 ppm RMS	
	Static and Fast Static	H: 2.5 mm + 0.5 ppm RMS		V: 5 mm + 0.5 ppm RMS	
	Post Processing Kinematic (PPK / Stop & Go)	H: 8 mm + 1 ppm RMS		V: 15 mm + 1 ppm RMS	
		Initialization time: typically 10 min for base and 5 min for rover Initialization reliability: typically >99.9%			
	PPP	H: 10 cm		V: 20 cm	
	Code Differential GNSS Positioning	H: ±0.25 m+1 ppm RMS SBAS: 0.5 m (H), 0.85 m (V)		V: ±0.5 m+1 ppm RMS	
	Real Time Kinematic (RTK)	H: 8 mm+1 ppm RMS Initialization time: typically < 10 s		V:15 mm+1 ppm RMS Initialization reliability: typically > 99.9%	
	Hi-Fix <sup>[3]</sup>	H: RTK+10 mm / minute RMS		V:RTK+20 mm / minute RMS	
	Time to First Fix <sup>[4]</sup>	Cold start: < 45 s	Hot start: < 30 s		Signal re-acquisition: < 2 s
	Positioning Rate	1 Hz, 5 Hz and 10 Hz			
	Tilt Survey Performance	200 Hz, auto calibration, additional horizontal pole-tilt uncertainty typically less than H: 8 mm+0.7 mm/°tilt(0~60°); V: 15 mm+0.7 mm/°tilt (0~60°)			
	Image Stakeout Accuracy	2 cm accuracy			
Laser Measurement	2 cm accuracy within 10 m				
<b>Physical</b>	Dimensions (W x H)	130.97 mm × 68.7 mm			
	Weight	≤ 0.73 kg ( 1.61 lb )			
	Operation Temperature	-40 C ~ +75 C			
	Storage Temperature	-55 C ~ +85 C			
	Humidity	100% non-condensing			
	IP Rating	IP68 ( according to IEC 60529 )			
	Shock and Vibration	MIL-STD-810G, 514.6			
	Free Fall	Designed to survive a 1.8 m natural fall onto concrete			
<b>Electrical</b>	Internal Battery <sup>[5]</sup>	RTK rover(UHF/GSM): up to 20 h; UHF RTK Base: up to 13 h; GSM RTK Base: up to 17 h			
	External Power	using standard smartphone chargers or external power banks (Support 5V 2.8A Type-C USB external charging)			
<b>Communication</b>	I/O Interface	1 × USB type C port; 1 × SMA antenna port, 1 × Nano SIM card slot			
	Wi-Fi	Frequency 2400 - 2483.5 MHz; P (e.i.r.p) Max: 23 dBm			
	Bluetooth	BT 5.2, 2.4 GHz			
	NFC	Receive only			
	Network Modem	LTE (B1, B3, B5, B8, B28, B40, B41), GSM			
	Internal UHF Radio	Power: 1 W / 1.5 W adjustable			
		Frequency: 410 MHz~470 MHz			
Protocol: TRIMTALK450S, TRIMMARK III, SATEL-3AS, TRANSEOT, etc. Channel spacing: 12.5 kHz					
<b>Laser</b>	Laser Product Classification	Class 3R			
<b>Camera</b>	Front Camera	Support image-assisted measurement and AR stakeout			
	Bottom Camera	Support AR stakeout			
<b>Control Panel</b>	Physical Button	1			
	LED Lights	Satellite, signal, power			
<b>System Configuration</b>	Storage	64 GB ROM internal storage			
	Output Format	ASCII: NMEA-0183			
	Output Rate	1Hz~20Hz			
	Static Data Format	GNS, Rinex			
	Real Time Kinematic (RTK)	RTCM2.X, RTCM3.X, CMR			
Network Mode	VRS, FKP, MAC, support NTRIP protocol				

Note:  
<sup>[1]</sup>QZSS L6 can be provided by firmware upgrade.  
<sup>[2]</sup>The measurement accuracy, precision, reliability and initialization time depend on various factors, including tilt angle, number of satellites, geometric distribution, observation time, atmospheric conditions and multi-path validation, etc. The data are derived under normal conditions.  
<sup>[3]</sup>Accuracies are dependent on GNSS satellite availability. Hi-Fix Positioning ends after 5 minutes without differential data. Hi-Fix is not available in all regions, check with your local sales representative for more information.  
<sup>[4]</sup>Irregular operations such as rapid rotation and high-intensity vibration may affect the inertial navigation accuracy.  
<sup>[5]</sup>Rechargeable built-in 7.2V / 4900 mAh lithium battery; operating time varies with environment, temperature, and battery condition.  
<sup>[6]</sup> This distance can be achieved when using a super base station.  
 \*Descriptions and Specifications are subject to change without notice